
- one-seater bath with side overflow and integrated arm rests
- combi-bath suitable for bathing and showering
- also available with grips
- made of KALDEWEI steel enamel



Similar illustration



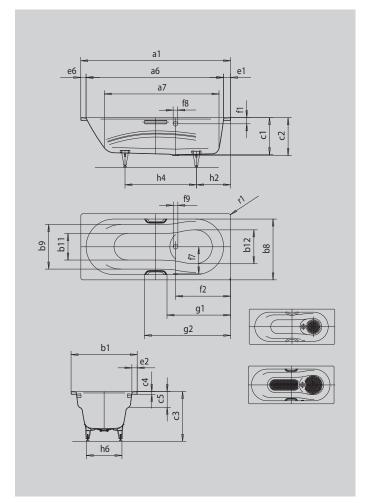


| Model  |  | 944             |
|--|--|-----------------|
| External length  | a <sub>1</sub>                                   | 1700 mm         |
| Internal length (top)                                    | a <sub>6</sub>                                   | 1460 mm         |
| Internal length (bottom)                                 | a <sub>7</sub>                                   | 1200 mm         |
| External width   | b <sub>1</sub>                                   | 700 mm          |
| Internal width bathing area (with; without armrest)      | $b_8; b_9$                                       | 580; 470 mm     |
| Internal width (bottom)                                  | b <sub>11</sub> ; b <sub>12</sub>                | 420; 475 mm     |
| Depth inside   | c <sub>1</sub>                                   | 420 mm          |
| Depth incl. waste hole                                   | C <sub>2</sub>                                   | 430 mm          |
| Height with feet   | c <sub>3</sub>                                   | 567 - 590 mm    |
| Height of rim  | C <sub>4</sub>                                   | 32 mm           |
| Armrest depth  | C <sub>5</sub>                                   | 175 mm          |
| Width of rim (foot end; long side; head end)             | e <sub>1</sub> ; e <sub>2</sub> ; e <sub>6</sub> | 130; 60; 110 mm |
| Distance top edge to centre of overflow hole             | f <sub>1</sub>                                   | 70 mm           |
| Distance bath edge to centre of waste hole               | $f_2$  | 625 mm          |
| Distance centre of waste hole to centre of overflow hole | f <sub>7</sub>                                   | 280 mm          |
| Diameter of overflow hole                                | f <sub>8</sub>                                   | Ø 52 mm         |
| Diameter of waste hole                                   | $f_g$  | Ø 52 mm         |
| Distance foot end of bath edge to centre of foot         | h <sub>2</sub>                                   | 485 mm          |
| Distance between the feet                                | h <sub>4</sub>                                   | 625 mm          |
| Width of feet max.                                       | h <sub>6</sub>                                   | 430 mm          |
| External radius  | r <sub>1</sub>                                   | 8 mm            |
| Water volume   |  | 1001            |
| Net weight   |  | 47 kg           |
| Diameter of anti-slip                                    |  | Ø 288 mm        |



- one-seater bath with side overflow and integrated arm rests
- combi-bath suitable for bathing and showering
- also available with grips
- made of KALDEWEI steel enamel



Similar illustration

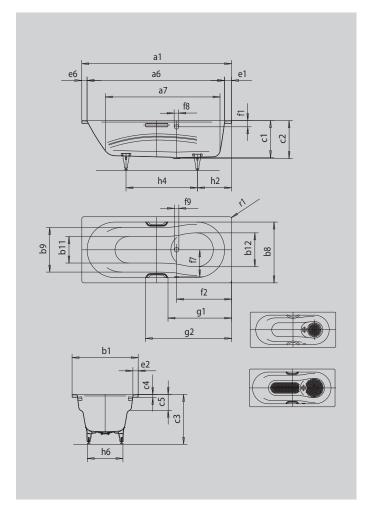




| Model  |  | 946            |
|--|--|----------------|
| External length  | a <sub>1</sub>                                   | 1800 mm        |
| Internal length (top)                                    | a <sub>6</sub>                                   | 1560 mm        |
| Internal length (bottom)                                 | a <sub>7</sub>                                   | 1300 mm        |
| External width   | b <sub>1</sub>                                   | 800 mm         |
| Internal width bathing area (with; without armrest)      | $b_{g}$ ; $b_{g}$                                | 630; 505 mm    |
| Internal width (bottom)                                  | b <sub>11</sub> ; b <sub>12</sub>                | 450; 525 mm    |
| Depth inside   | c <sub>1</sub>                                   | 420 mm         |
| Depth incl. waste hole                                   | C <sub>2</sub>                                   | 430 mm         |
| Height with feet   | <b>c</b> <sub>3</sub>                            | 560 - 580 mm   |
| Height of rim  | C <sub>4</sub>                                   | 32 mm          |
| Armrest depth  | C <sub>5</sub>                                   | 175 mm         |
| Width of rim (foot end; long side; head end)             | e <sub>1</sub> ; e <sub>2</sub> : e <sub>6</sub> | 130;85; 110 mm |
| Distance top edge to centre of overflow hole             | f <sub>1</sub>                                   | 70 mm          |
| Distance bath edge to centre of waste hole               | f <sub>2</sub>                                   | 675 mm         |
| Distance centre of waste hole to centre of overflow hole | f <sub>7</sub>                                   | 310 mm         |
| Diameter of overflow hole                                | f <sub>8</sub>                                   | Ø 52 mm        |
| Diameter of waste hole                                   | f <sub>q</sub>                                   | Ø 52 mm        |
| Distance foot end of bath edge to centre of foot         | h <sub>2</sub>                                   | 485 mm         |
| Distance between the feet                                | $h_{_4}$   | 725 mm         |
| Width of feet max.                                       | h <sub>6</sub>                                   | 485 mm         |
| External radius  | r <sub>1</sub>                                   | 23 mm          |
| Water volume   |  | 1351           |
| Net weight   |  | 55 kg          |
| Diameter of anti-slip                                    |  | Ø 288 mm       |



- one-seater bath with side overflow and integrated arm rests
- combi-bath suitable for bathing and showering
- also available with grips
- made of KALDEWEI steel enamel



Similar illustration

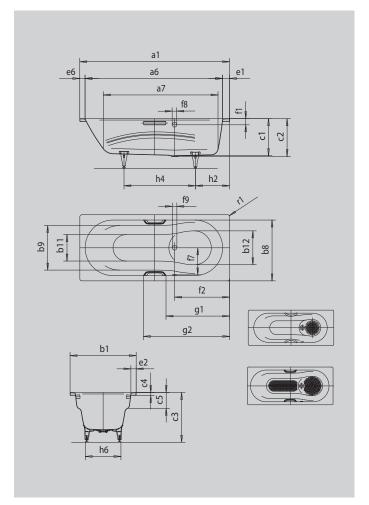




| Model  |  | 954          |
|--|--|--------------|
| External length  | a <sub>1</sub>                                   | 1700 mm      |
| Internal length (top)                                    | a <sub>6</sub>                                   | 1560 mm      |
| Internal length (bottom)                                 | a <sub>7</sub>                                   | 1300 mm      |
| External width   | b <sub>1</sub>                                   | 750 mm       |
| Internal width bathing area (with; without armrest)      | $b_8; b_9$                                       | 630;505 mm   |
| Internal width (bottom)                                  | b <sub>11</sub> ; b <sub>12</sub>                | 450; 525 mm  |
| Depth inside   | c <sub>1</sub>                                   | 420 mm       |
| Depth incl. waste hole                                   | C <sub>2</sub>                                   | 430 mm       |
| Height with feet   | C <sub>3</sub>                                   | 560 - 580 mm |
| Height of rim  | C <sub>4</sub>                                   | 32 mm        |
| Armrest depth  | c <sub>s</sub>                                   | 175 mm       |
| Width of rim (foot end; long side; head end)             | e <sub>1</sub> ; e <sub>2</sub> ; e <sub>6</sub> | 80;60;60 mm  |
| Distance top edge to centre of overflow hole             | f <sub>1</sub>                                   | 70 mm        |
| Distance bath edge to centre of waste hole               | f <sub>2</sub>                                   | 625 mm       |
| Distance centre of waste hole to centre of overflow hole | f <sub>7</sub>                                   | 310 mm       |
| Diameter of overflow hole                                | f <sub>8</sub>                                   | Ø 52 mm      |
| Diameter of waste hole                                   | $f_9$  | Ø 52 mm      |
| Distance foot end of bath edge to centre of foot         | h <sub>2</sub>                                   | 435 mm       |
| Distance between the feet                                | h <sub>4</sub>                                   | 725 mm       |
| Width of feet max.                                       | h <sub>6</sub>                                   | 488 mm       |
| External radius  | r,   | 8 mm         |
| Water volume   |  | 1351         |
| Net weight   |  | 50 kg        |
| Diameter of anti-slip                                    |  | Ø 288 mm     |



- one-seater bath with side overflow and integrated arm rests
- combi-bath suitable for bathing and showering
- also available with grips
- made of KALDEWEI steel enamel



Similar illustration

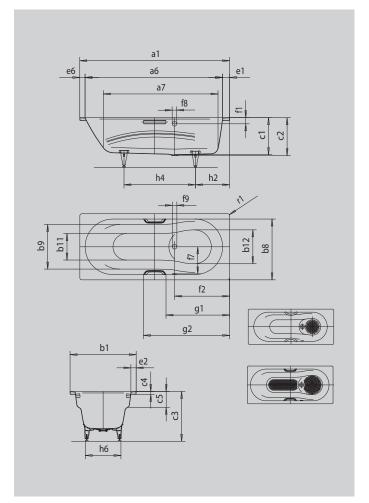



| Model  |  | 956          |
|--|--|--------------|
| External length  | a <sub>1</sub>                                   | 1600 mm      |
| Internal length (top)                                    | a <sub>6</sub>                                   | 1460 mm      |
| Internal length (bottom)                                 | a <sub>7</sub>                                   | 1200 mm      |
| External width   | b <sub>1</sub>                                   | 700 mm       |
| Internal width bathing area (with; without armrest)      | b <sub>8</sub> ; b <sub>9</sub>                  | 580; 470 mm  |
| Internal width (bottom)                                  | b <sub>11</sub> ; b <sub>12</sub>                | 420; 475 mm  |
| Depth inside   | <b>c</b> <sub>1</sub>                            | 420 mm       |
| Depth incl. waste hole                                   | C <sub>2</sub>                                   | 430 mm       |
| Height with feet   | C <sub>3</sub>                                   | 560 - 580 mm |
| Height of rim  | C <sub>4</sub>                                   | 32 mm        |
| Armrest depth  | C <sub>5</sub>                                   | 175 mm       |
| Width of rim (foot end; long side; head end)             | e <sub>1</sub> ; e <sub>2</sub> ; e <sub>6</sub> | 80;60;60 mm  |
| Distance top edge to centre of overflow hole             | f <sub>1</sub>                                   | 70 mm        |
| Distance bath edge to centre of waste hole               | f <sub>2</sub>                                   | 575 mm       |
| Distance centre of waste hole to centre of overflow hole | f <sub>7</sub>                                   | 280 mm       |
| Diameter of overflow hole                                | f <sub>8</sub>                                   | Ø 52 mm      |
| Diameter of waste hole                                   | $f_9$  | Ø 52 mm      |
| Distance foot end of bath edge to centre of foot         | h <sub>2</sub>                                   | 435 mm       |
| Distance between the feet                                | h <sub>4</sub>                                   | 625 mm       |
| Width of feet max.                                       | h <sub>6</sub>                                   | 425 mm       |
| External radius  | r <sub>1</sub>                                   | 8 mm         |
| Water volume   |  | 1001         |
| Net weight   |  | 45 kg        |
| Diameter of anti-slip                                    |  | Ø 288 mm     |

