


## Uponor S-Press PLUS elbow female thread 25-Rp1"FT

**1070543**

- Made of tin-plated DR brass

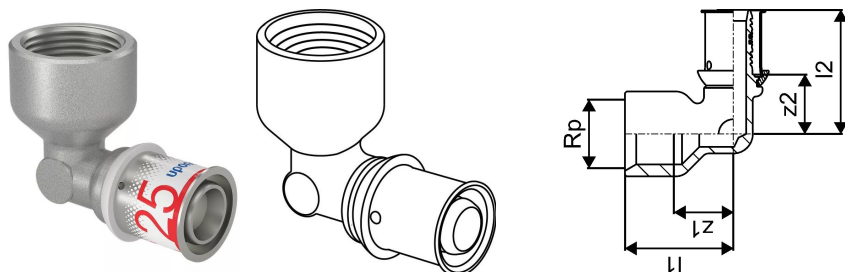

### Application information Uponor S-Press PLUS elbow female thread

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS elbow female thread 25-Rp1"FT

1070543

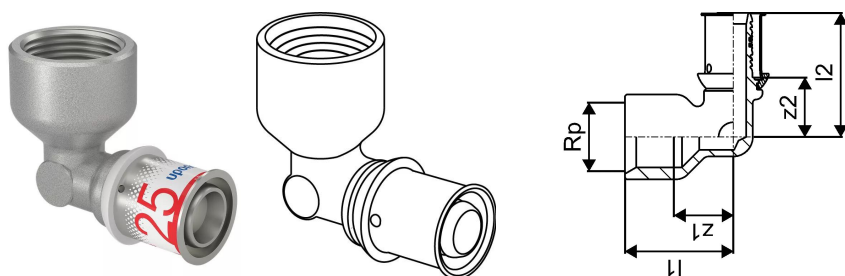

### Technical data

|                            |           |
|----------------------------|-----------|
| Item no VVS                | 045472315 |
| Item no NRF                | 5114472   |
| Item (unit of measurement) | Piece     |
| Female thread Rp           | 1 inch    |
| Length (l1)                | 45 mm     |
| Length (l2)                | 54 mm     |
| Z-measurement z2           | 26 mm     |
| Packaging Quantity PL1     | 5         |
| Packaging Quantity PL3     | 20        |
| Packaging Quantity PL4     | 1920      |

### Documents

Page with all documents

#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com