

UNILIFT CC

# MULTI-PURPOSE DRAINAGE PUMPS



The UNILIFT CC comprises of lightweight yet highly efficient drainage pumps, designed for pumping domestic drain water and grey wastewater. In addition UNILIFT CC 7 and 9 can also pump seawater.

The submersible single-stage pumps have semi-open impellers that allow particles of Ø10 to pass freely while a stainless steel strainer prevents anything bigger to enter the pump. Suitable for both permanent and temporary installation the UNILIFT CC is flexible drainage pumps, ideal for both urgent and recurring drainage installations.

# THE UNILIFT CC IN MORE DETAIL

## BENEFITS

- Lightweight
- Permanent as well as portable installation
- Simple installation
- Service-friendly
- Optional automatic operation
- High grade stainless steel suitable for light aggressive liquids

## APPLICATIONS

- Rainwater, drainage water and water from flooding
- Pool water
- Effluents from showers, washing machines and sinks below sewer level
- Comes in a high grade stainless steel suitable for light aggressive liquids


## UNILIFT CC – KEY FEATURES

- Pumping down to a level of 3 mm above floor
- Prevention of backflow
- Thermal overload protection
- Handy and easy to transport
- Self-venting valve
- Auto-restart
- Connectivity to different outlets via adaptor

## UNILIFT CC – RANGE

Pump type				Weight [kg]
	H1	B1	B2	
UNILIFT CC 5	305	160	26.5	4.35
UNILIFT CC 7	305	160	26.5	4.6
UNILIFT CC 9	340	160	26.5	6.5

## UNILIFT CC – PERFORMANCE CURVE

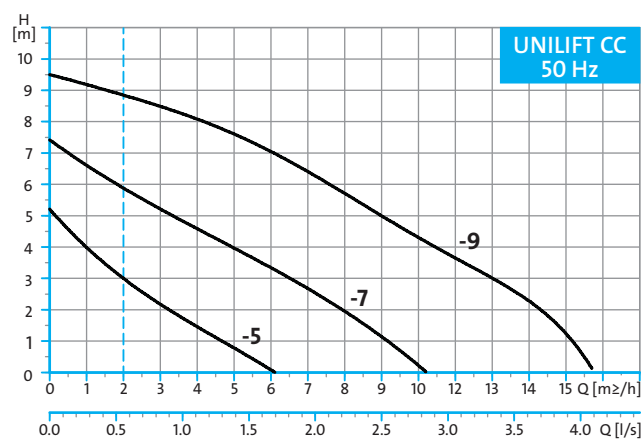

## UNILIFT CC – TECHNICAL DATA

- Max. flow rate, Q: 14 m³/h
- Max. head, H: 9 m
- Liquid temp.: 0 °C to +40 °C
- Max. particle size: Ø10
- Material: Composite
- Low suction to 3 mm

