



- Deck mounted
- Chrome
- Fixed spout
- PCA® - constant flow rate regardless of pressure variations, Hidden aerator
- Hot/Cold symbols, Single operating lever/handle
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- ø 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, Rapid installation system
- Without pop-up waste, Without draw-rod opening

TECHNICAL DATA

FLOW PROPERTIES

Flow-rate at 3 bar (with flow controller)	6.0 l/min
Pressure loss with flow (0.1 l/s)	2 bar

TECHNICAL PROPERTIES



DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	1-10 bar
Connection size	G3/8
Projection	100 mm
Backflow prevention (EN1717)	AA
Material	Brass

REGULATIONS


EN standard	EN 817
Noise class	I (ISO 3822)

APPROVALS AND DECLARATIONS

DVGW	NW-6506CN0310
ABP	PA-IX 38216/IO
Declaration of conformity	DoC

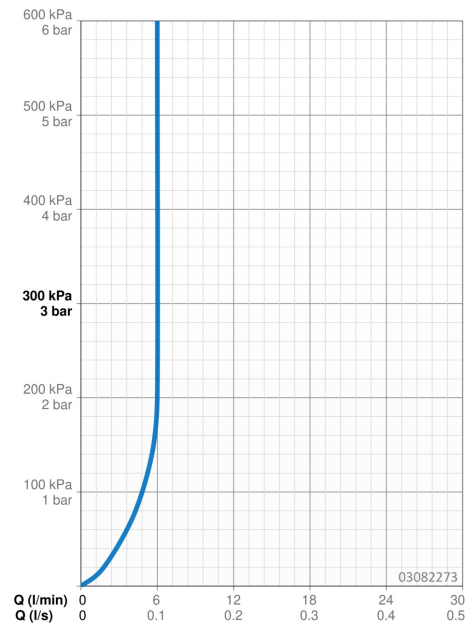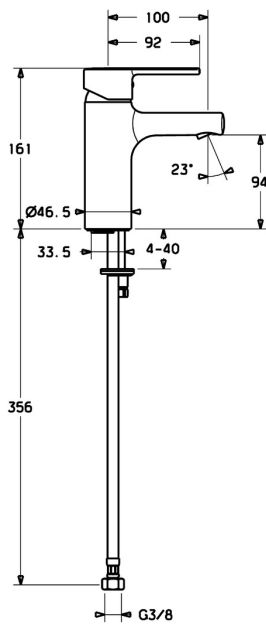

SPARE PARTS

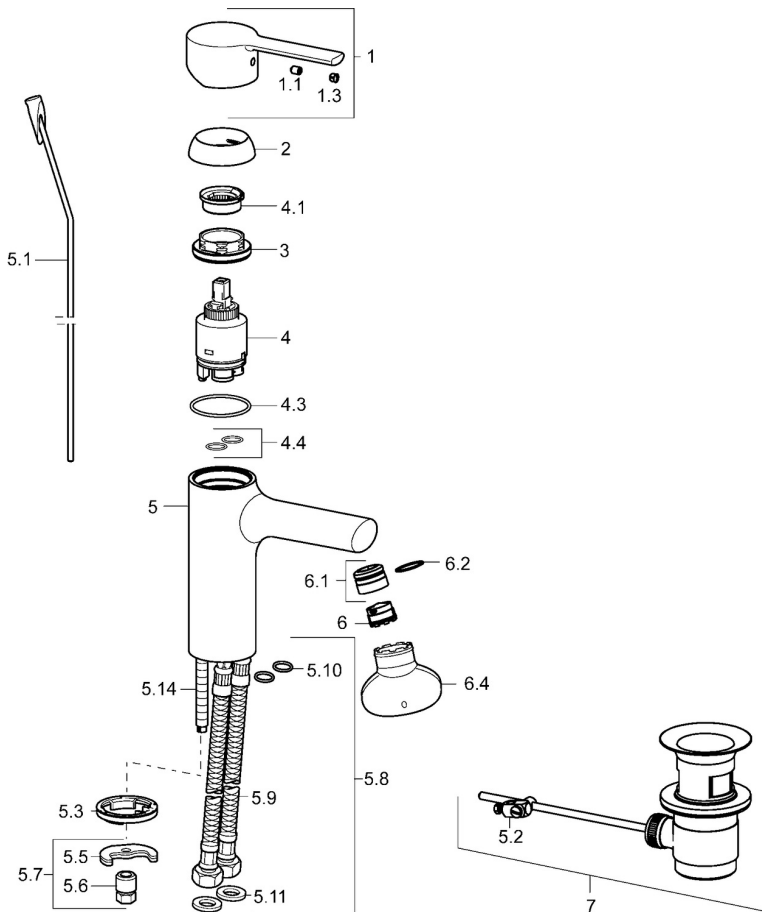

SP03092273

	Name	Code
1	Lever Chrome	59913761
1.1	Screw, M5x8, SW2.5	59904755
1.3	Cover plug Chrome	59913762
2	Covering cap, 33x3 mm Chrome	59912504
3	Tightening nut, M40x1, SW30	1003409V
4	Cartridge, 3.5	59912324
4	Cartridge, 3.5 Classic	59913075
4.1	Temperature adjustment limiter Discontinued	59912325
4.3	O-ring, d 28.24x2.62 Discontinued	59912590
4.4	O-ring, d 10.10x1.60 Discontinued	59905072
5.1	Pop-up operating rod Chrome	59913652
5.2	Swivel joint	59904624
5.3	Bottom seal	59914591
5.5	Fixing plate Discontinued	59904765
5.6	Screw, M8x1, SW13 Discontinued	59904766
5.7	Fixing set	59910749
5.8	Flexible pipe, L=430, G3/8-M10x1 RH Discontinued	59913213
5.9	Flexible pipe, L=430, G3/8-M10x1	59912515
5.10	O-ring, d 7.65x1.78	59902337
5.11	Gasket, 9.5x14.4x2	59912551
5.14	Fixing screw, M8x1, L=140	59912474
6	Aerator, M18.5x1, TJ	59913366
6.1	Fitting ring for aerator Chrome	59913654
6.4	Key for aerator, M18.5x1	59913367
7	Pop-up waste Chrome	59904620
N.I.	Key, SW30/34	59912108
N.I.	Cover flange, d 55 mm Chrome	59913471