



- Deck mounted
 - Chrome
 - Fixed spout
 - PCA® - constant flow rate regardless of pressure variations, Hidden aerator
 - Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
 - ø 35 mm ceramic cartridge for flow and temperature control
 - Flexible inlet pipes
 - Inner body made of DZR brass
 - Without pop-up waste, Without draw-rod opening

TECHNICAL DATA

FLOW PROPERTIES

Flow-rate at 3 bar (with flow controller)	6.0 l/min
Pressure loss with flow (0.1 l/s)	2 bar

TECHNICAL PROPERTIES

DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	1-10 bar
Connection size	G3/8
Projection	148 mm
Backflow prevention (EN1717)	AA
Material	Brass

REGULATIONS



EN standard	EN 817
Noise class	I (ISO 3822)

APPROVALS AND DECLARATIONS


DVGW	NW-6506CN0310
ABP	PA-IX 38216/IO
Declaration of conformity	DoC
EPD	S-P-06391

SUSTAINABILITY

EPD module A1-A3 (kg CO2 eq.)	11,42
EPD module A4 (kg CO2 eq.)	0,32
EPD module B7 (kg CO2 eq.)	1854,00
EPD module C2 (kg CO2 eq.)	0,02
EPD module C3 (kg CO2 eq.)	0,02
EPD module C4 (kg CO2 eq.)	0,09
EPD module D (kg CO2 eq.)	-8,12

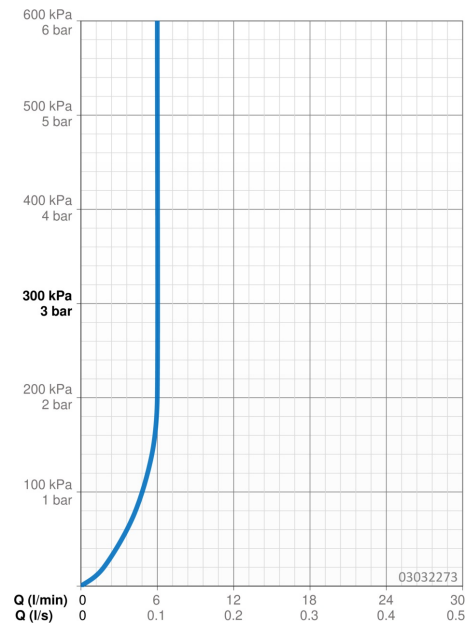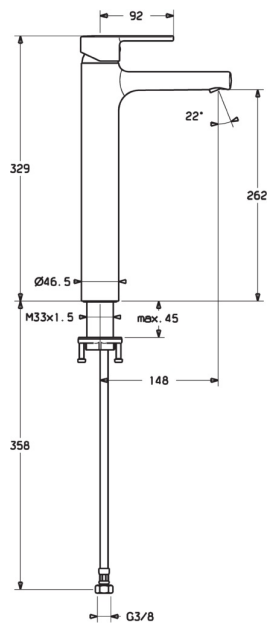

SPARE PARTS

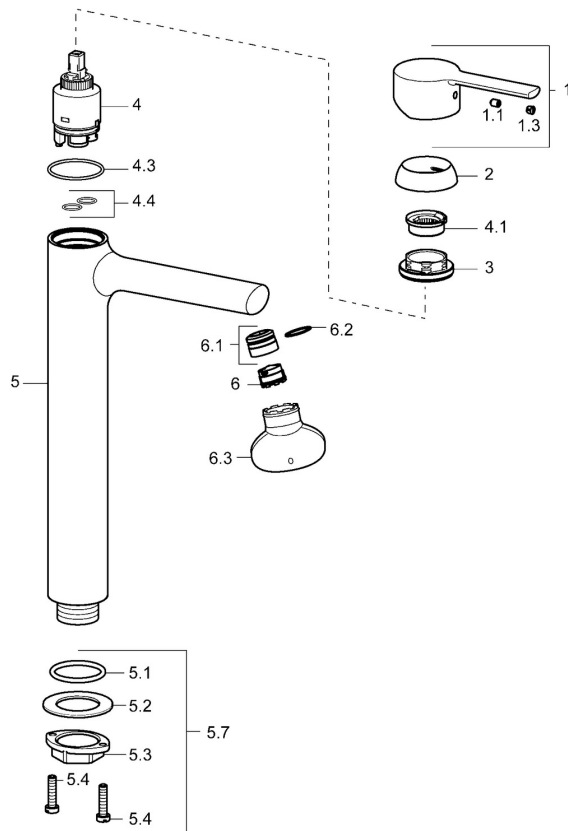

SP03032273

	Name	Code
1	Lever Chrome	59913761
1.1	Screw, M5x8, SW2.5	59904755
1.3	Cover plug Chrome	59913762
2	Covering cap, 33x3 mm Chrome	59912504
3	Tightening nut, M40x1, SW30	1003409V
4	Cartridge, 3.5	59912324
4	Cartridge, 3.5 Classic	59913075
4.1	Temperature adjustment limiter Discontinued	59912325
4.3	O-ring, d 28.24x2.62 Discontinued	59912590
4.4	O-ring, d 10.10x1.60 Discontinued	59905072
5.1	O-ring, d 36.09x d 3.53	59913396
5.7	Fixing set	59913479
5.8	Flexible pipe, L=590, G3/8-M10x1 Discontinued	59913166
5.9	O-ring, d 7.65x1.78	59902337
5.10	Gasket, 9.5x14.4x2	59912551
6	Aerator, M18.5x1, TJ	59913366
6.1	Fitting ring for aerator Chrome	59913654
6.3	Key for aerator, M18.5x1	59913367
N.I.	Key, SW30/34	59912108