

- Concealed wall mounting
 - Matt black
 - Temperature control handle, Flow control handle
 - Turn operated diverter
- Safety stop against scalding at 38°C
 - Thermostatic cartridge for automatic temperature control, Non-return valve(s)
 - Inner body made of DZR brass, Manual, ceramic, pressure independent diverter with volume control and stop function for two outlets
 - BLUECLICK for an easy, screwless trim plate installation, BLUETUNE alignment after installation of +/- 3,5°, Function unit, Fastening of the function unit with screws, Rosette plate frame, Round rosette, Sleeve

TECHNICAL DATA

FLOW PROPERTIES

Flow-rate at 3 bar	20.4 / 20.4 l/min
--------------------	-------------------

TECHNICAL PROPERTIES

Hot water supply	max. +80°C
Working pressure	1-10 bar
Diameter	170 mm
Backflow prevention (EN1717)	EB
Material	Brass

REGULATIONS



EN standard	EN 1111
Noise class	I (ISO 3822)

APPROVALS AND DECLARATIONS


Declaration of conformity	DoC
EPD	S-P-07752

SUSTAINABILITY

EPD module A1-A3 (kg CO2 eq.)	25,00
EPD module A4 (kg CO2 eq.)	0,41
EPD module B7 (kg CO2 eq.)	3937,20
EPD module C2 (kg CO2 eq.)	0,02
EPD module C3 (kg CO2 eq.)	0,02
EPD module C4 (kg CO2 eq.)	0,33
EPD module D (kg CO2 eq.)	-7,73

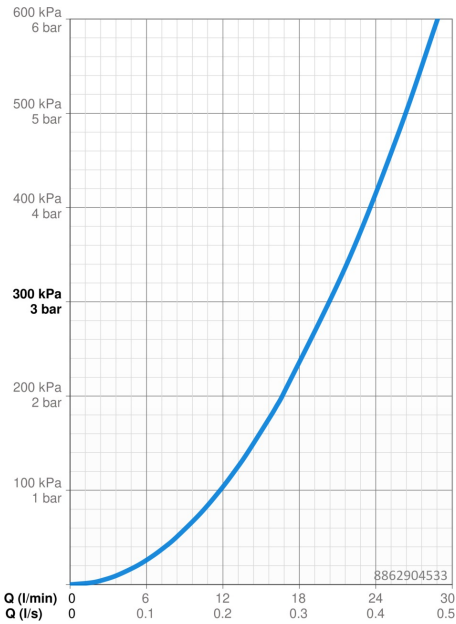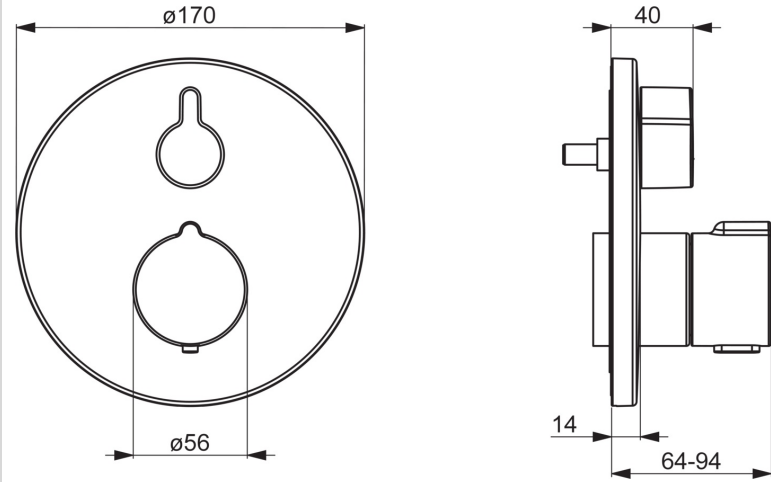

SPARE PARTS

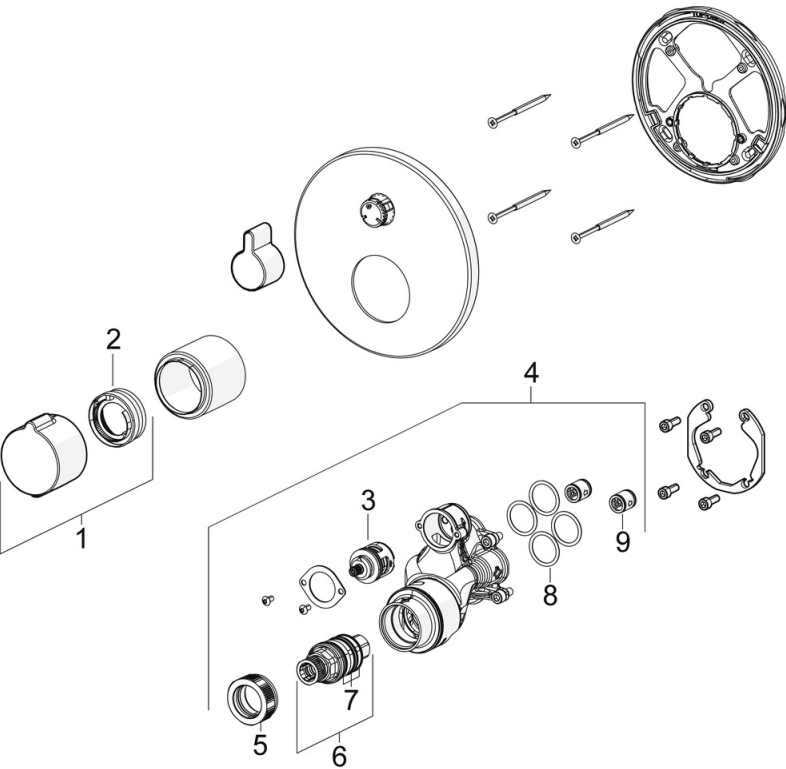

SP8862904533

	Name	Code
01	Temperature control handle Matt black	1018457V-33
02	Temperature adjustment limiter	59914426
03	Diverter	59914183
04	Functional unit, (8114, 8862)	59914311
05	Tightening nut, M36x1.5, SW38	59914319
06	Thermostatic cartridge, 3.4	59914114
07	O-ring kit	59914113
08	O-ring, 23.47x2.62	59914304
09	Non-return valve	59905714
N.I.	Diverter, 120°	59914655