



- Concealed wall mounting
- Matt black
- Temperature control handle, Flow control handle
- Turn operated diverter
- Safety stop against scalding at 38°C
- Thermostatic cartridge for automatic temperature control, Non-return valve(s)
- Inner body made of DZR brass, Manual, ceramic, pressure independent diverter with volume control and stop function for two outlets
- BLUECLICK for an easy, screwless trim plate installation, BLUETUNE alignment after installation of +/- 3,5°, Function unit, Fastening of the function unit with screws, Square rosette

TECHNICAL DATA

FLOW PROPERTIES

Flow-rate at 3 bar	20.4 / 20.4 l/min
--------------------	-------------------

TECHNICAL PROPERTIES

Hot water supply	max. +80°C
Working pressure	1-10 bar
Backflow prevention (EN1717)	EB
Material	Brass

REGULATIONS



EN standard	EN 1111
Noise class	I (ISO 3822)

APPROVALS AND DECLARATIONS


DVGW	DW-6509CS0197
ABP	PA-IX 38188/IDD
Declaration of conformity	DoC
EPD	S-P-07752

SUSTAINABILITY

EPD module A1-A3 (kg CO2 eq.)	23,83
EPD module A4 (kg CO2 eq.)	0,39
EPD module B7 (kg CO2 eq.)	3937,20
EPD module C2 (kg CO2 eq.)	0,02
EPD module C3 (kg CO2 eq.)	0,02
EPD module C4 (kg CO2 eq.)	0,31
EPD module D (kg CO2 eq.)	-7,37

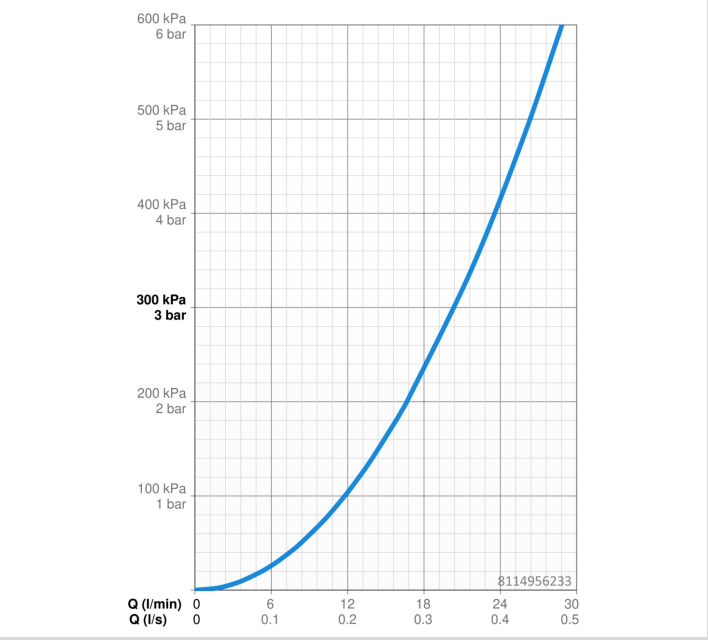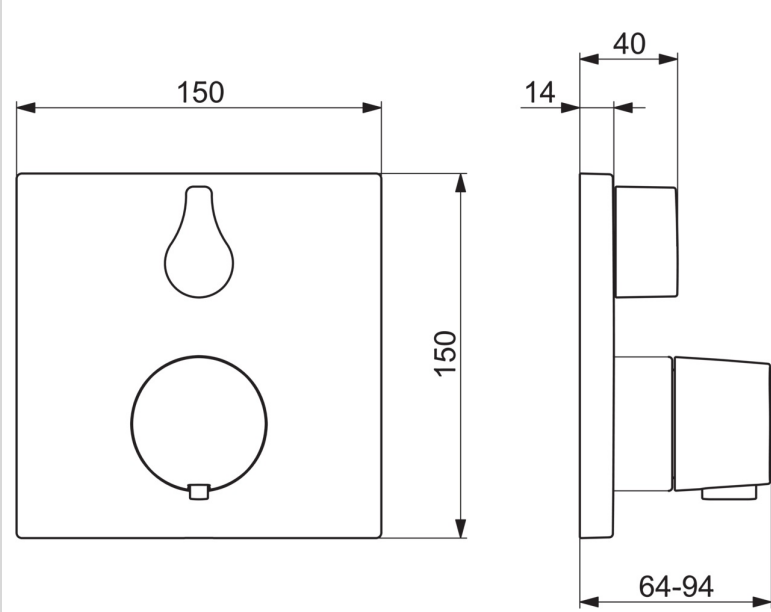

SPARE PARTS

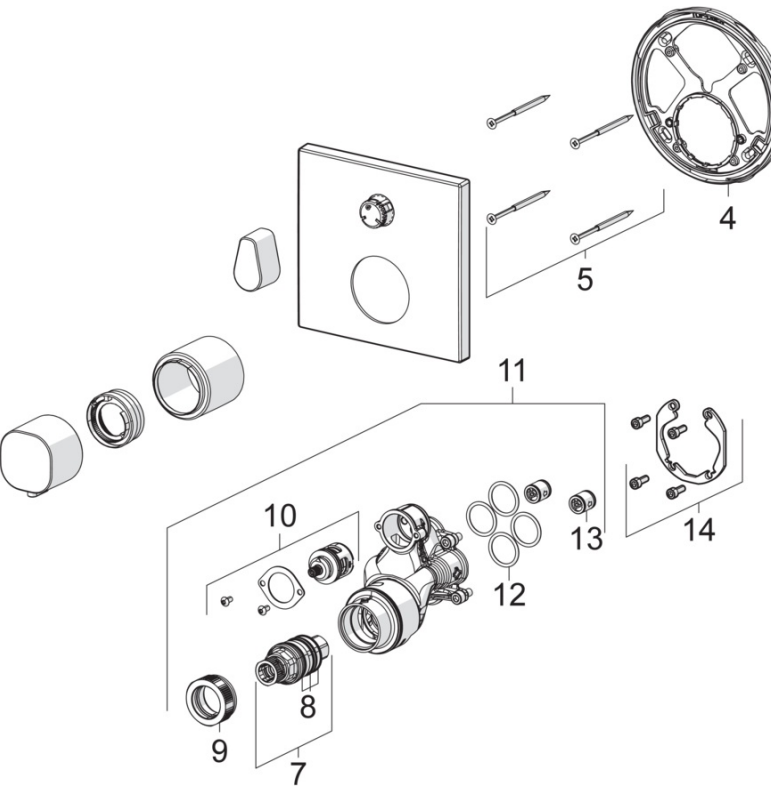

SP8113956233

	Name	Code
04	Fixing part	59914307
05	Screw, M4.5x80	59912890
07	Thermostatic cartridge, 3.4	59914114
08	O-ring kit	59914113
09	Tightening nut, M36x1.5, SW38	59914319
10	Diverter	59914183
11	Functional unit, (8114, 8862)	59914311
11	Functional unit, (8113, 8861)	59914316
12	O-ring, 23.47x2.62	59914304
13	Non-return valve	59905714
14	Installation kit	59914186
N.I.	Raising kit, 15 mm	59914182
N.I.	Adapter, H/C reversed	59914184