

Qty. Description

1 UNILIFT AP12.40.06.3



Note! Product picture may differ from actual product

Product No.: On request
Submersible drainage pump type

Vertical single-stage stainless steel submersible pump with vertical discharge port and integrated submersible 3-phase totally enclosed motor in insulation class F. The pump is fitted with a suction strainer.

The impeller is a SEMI OPEN impeller for 12 mm free passage suitable for pumping groundwater, surface water, rain water and similar.

The pump has a double shaft seal and an intermediate oil chamber pre-filled with non-toxic special oil.

The pump has a riser pipe, a cooling jacket for continuous cooling of the motor by the pumped liquid and long-life deep-groove greased-for-life ball bearings.

The pump is ready for use as it is fitted with carrying handle and is supplied with a 10 m mains cable. The mains cable is of the plug type with glass sealing compound in the socket to prevent penetration of humidity into the stator windings.





Liquid:
Pumped liquid: Any Newtonian liquid
Liquid temperature range: 0 .. 55 °C
Density: 998.2 kg/m³

Technical:
Type of impeller: SEMI OPEN
Maximum particle size: 12 mm


Materials:
Pump housing: Stainless steel
DIN W.-Nr. 1.4301
AISI 304
Impeller: Stainless steel
DIN W.-Nr. 1.4301
AISI 304

Qty.	Description
	Cable union: Brass CW602N C35330
	Installation: Range of ambient temperature: 0 .. 55 °C Pump outlet: Rp 1 1/2 Maximum installation depth: 7 m
	Electrical data: Power input - P1: 0.9 kW Mains frequency: 50 Hz Rated voltage: 3 x 400 V Rated current: 1.6 A Cos phi - power factor: 0.83 Rated speed: 2815 rpm Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): F Length of cable: 10 m Type of cable plug: NONE
	Others: Net weight: 12.7 kg Gross weight: 13.3 kg Danish VVS No.: 391314111 Swedish RSK No.: 5885776 Finnish LVI No.: 4822577 Country of origin: HU Custom tariff no.: 84137021

Description	Value
General information:	
Product name:	UNILIFT AP12.40.06.3
Product No:	On request
EAN number:	On request
Technical:	
Max flow:	5 l/s
Max flow:	5 l/s
Head max:	13 m
Type of impeller:	SEMI OPEN
Maximum particle size:	12 mm
Materials:	
Pump housing:	Stainless steel
Pump housing:	DIN W.-Nr. 1.4301
Pump housing:	AISI 304
Impeller:	Stainless steel
Impeller:	DIN W.-Nr. 1.4301
Impeller:	AISI 304
Cable union:	Brass
Cable union:	CW602N
Cable union:	C35330
Installation:	
Range of ambient temperature:	0 .. 55 °C
Pump outlet:	Rp 1 1/2
Maximum installation depth:	7 m
Inst dry/wet:	D/S
Installation:	horizontal or vertical
Liquid:	
Pumped liquid:	Any Newtonian liquid
Liquid temperature range:	0 .. 55 °C
Density:	998.2 kg/m ³
Electrical data:	
Power input - P1:	0.9 kW
P2:	0.6 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 400 V
Rated current:	1.6 A
Cos phi - power factor:	0.83
Rated speed:	2815 rpm
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	NONE
Thermal protec:	external
Length of cable:	10 m
Type of cable plug:	NONE
Others:	
Net weight:	12.7 kg
Gross weight:	13.3 kg
Danish VVS No.:	391314111
Swedish RSK No.:	5885776
Finnish LVI No.:	4822577
Country of origin:	HU
Custom tariff no.:	84137021

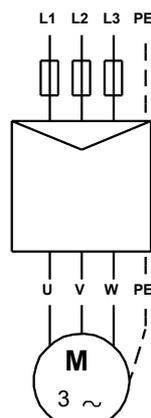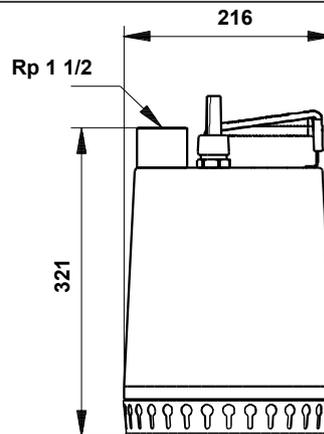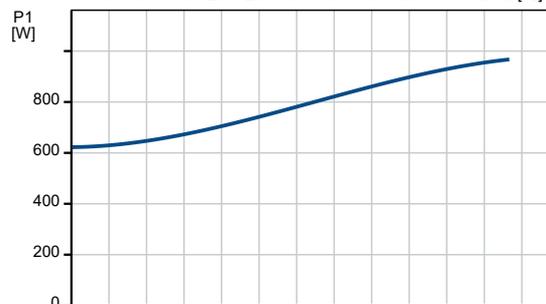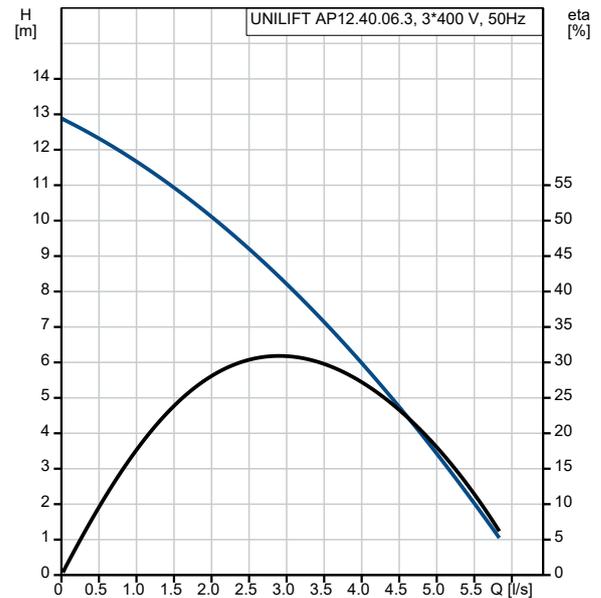


On request UNILIFT AP12.40.06.3 50 Hz

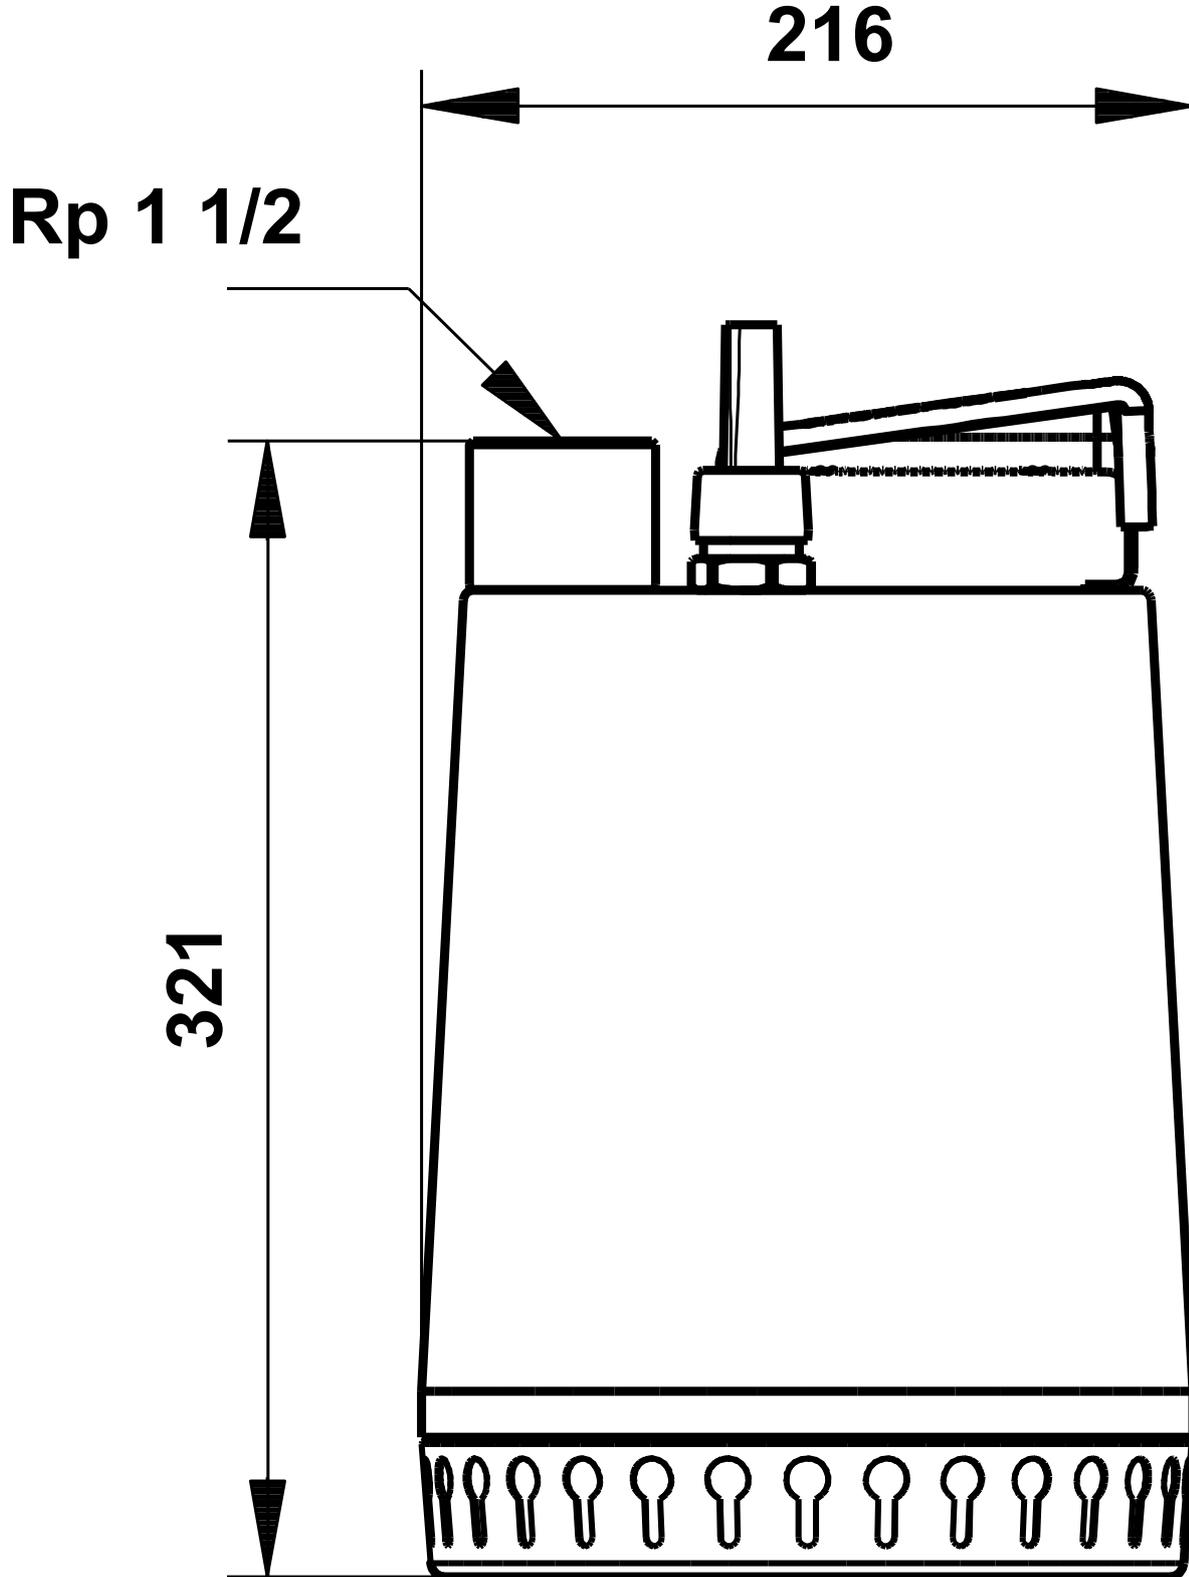

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

On request UNILIFT AP12.40.06.3 50 Hz

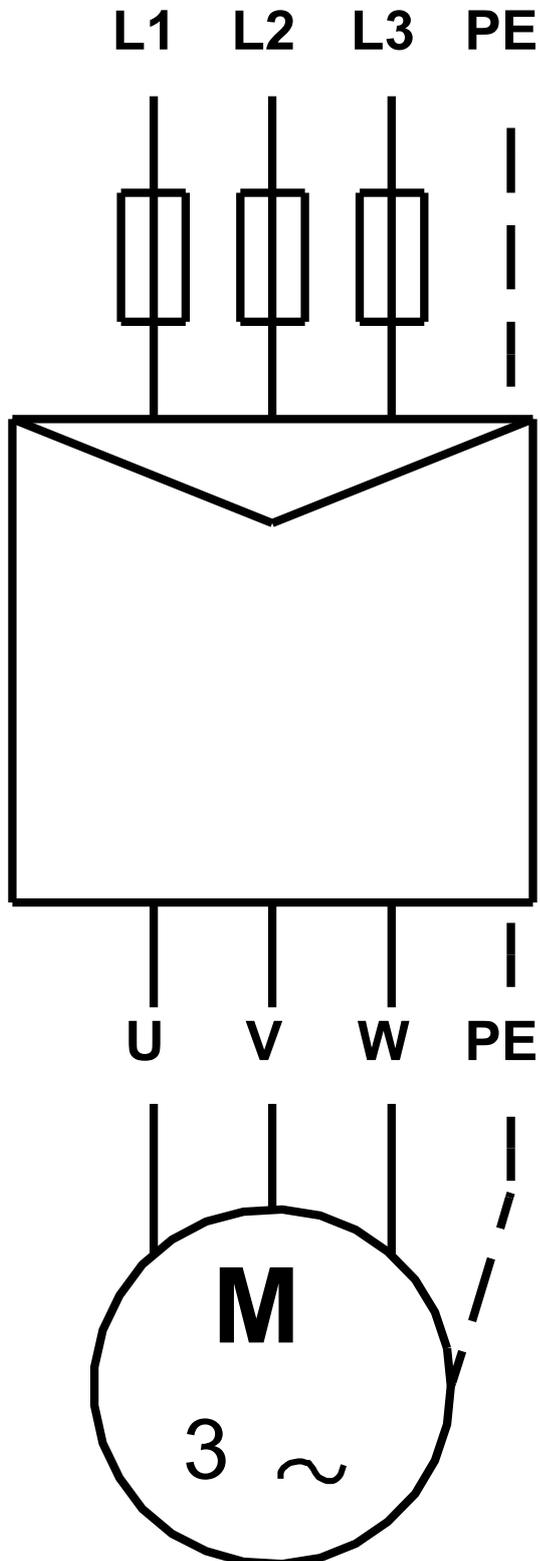

Note! All units are in [mm] unless others are stated.