

HANSA PRISMA. A Harmony of Simplicity and Elegance.



The timeless silhouette of an ancient, handcrafted bridge, perfectly mirrored in tranquil waters, evolves into a slender and elegant cylindric thermostat. Meticulously designed handles seamlessly complete the form without compromising functionality, exuding elegance from every angle.

Crafted to echo the refined elements of nature, this design uplifts any bathroom space. Elegant and functional, it reflects the essence of the HANSA PRISMA


ELEVATING YOUR MOMENTS

- Wall mounted
  - Chrome
  - Fixed spout
  - Standard aerator
  - Temperature control handle, Flow control handle, Hot/Cold symbols, Eco feature for water flow
- Turn operated diverter, Integrated into flow control handle
  - Safety stop against scalding at 38°C, The housing of the fittings conducts minimal heat
  - Ceramic head part for flow control, Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)
  - Eccentric coupling(s), Cover plate(s), Silencer(s)
  - Inner body made of DZR brass

| TECHNICAL DATA                |                 |
|-------------------------------|-----------------|
| FLOW PROPERTIES               |                 |
| Eco-flow at 3 bar             | 13.8 l/min      |
| Flow-rate at 3 bar            | 16.2/22.8 l/min |
| TECHNICAL PROPERTIES          |                 |
| Hot water supply              | max. +80°C      |
| Working pressure              | 1-10 bar        |
| Connection size               | G1/2            |
| Installation width            | 150 ± 15 mm     |
| Projection                    | 180 mm          |
| Backflow prevention (EN1717)  | EB              |
| Material                      | Brass/Composite |
| REGULATIONS                   |                 |
| EN standard                   | EN 1111         |
| Noise class                   | I (ISO 3822)    |
| APPROVALS AND DECLARATIONS    |                 |
| Declaration of conformity     | DoC             |
| EPD                           | S-P-06397       |
| SUSTAINABILITY                |                 |
| EPD module A1-A3 (kg CO2 eq.) | 13,12           |
| EPD module A4 (kg CO2 eq.)    | 0,52            |
| EPD module B7 (kg CO2 eq.)    | 2373,60         |
| EPD module C2 (kg CO2 eq.)    | 0,02            |
| EPD module C3 (kg CO2 eq.)    | 0,02            |
| EPD module C4 (kg CO2 eq.)    | 1,93            |
| EPD module D (kg CO2 eq.)     | -8,31           |

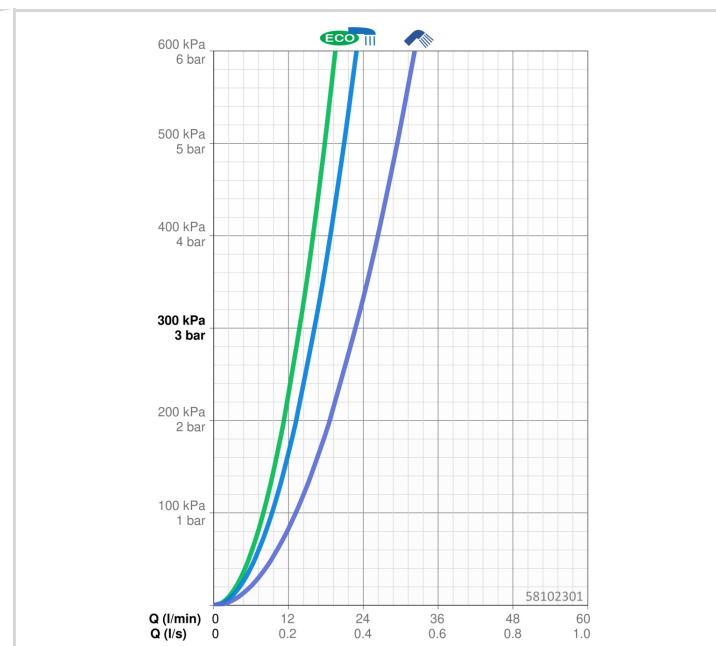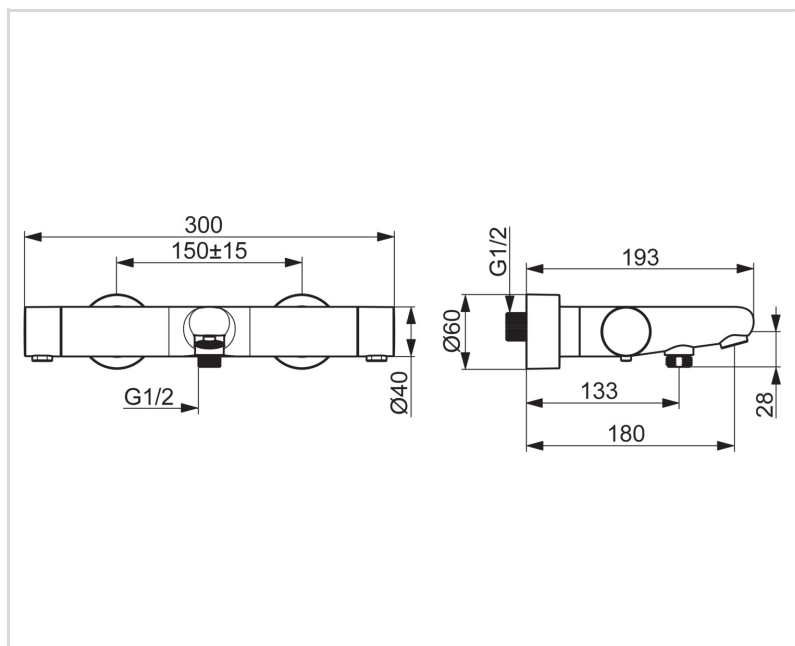

**SPARE PARTS**

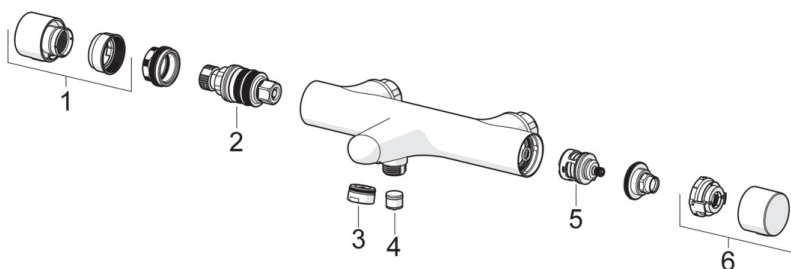

**SP58102301**

|    | Name                               | Code     |
|----|------------------------------------|----------|
| 01 | Temperature control handle Chrome  | 1018476V |
| 02 | Thermostatic cartridge, 3.4        | 59914114 |
| 03 | Aerator, STD M24x1, Laminar Chrome | 1018569V |
| 04 | Non-return valve, DW15/DN10K       | 1018484V |
| 05 | Diverter                           | 59914183 |
| 06 | Flow control handle Chrome         | 1018477V |